

MiMo Directional 2.4/5.0GHz Antenna

WMM[X]9G-24-58-NJ



WMM[X]9G-24-58-NJ

- Supports 2x2, 3x3 or 4x4 MiMo across 2.4/5-7.2GHz
- Up to 4x wideband elements with gain
- Suitable for mast and rail mounting
- Supports WiFi 6e


The WMM[X]9G-24-58 is a high directional gain 2x2, 3x3 or 4x4 MiMo antenna for WiFi networks. Incorporating two, three or four separately fed gain element assemblies in a single housing the WMM[X]9G-24-58 is equipped to provide client-side MiMo support for 2.4 and 5.0-7.2GHz networks.

The weather-resistant housing is designed for rail or mast mounting. Supplied with fitted N female bulkhead connections for easy installation the product can be fitted with a range of extension cables.

The WMM[X]9G-24-58 is a cost-effective value-added product for providing MiMo WiFi coverage to a room, platform or other areas.

Technical Drawing

WMM49G-24-58-NJ Shown

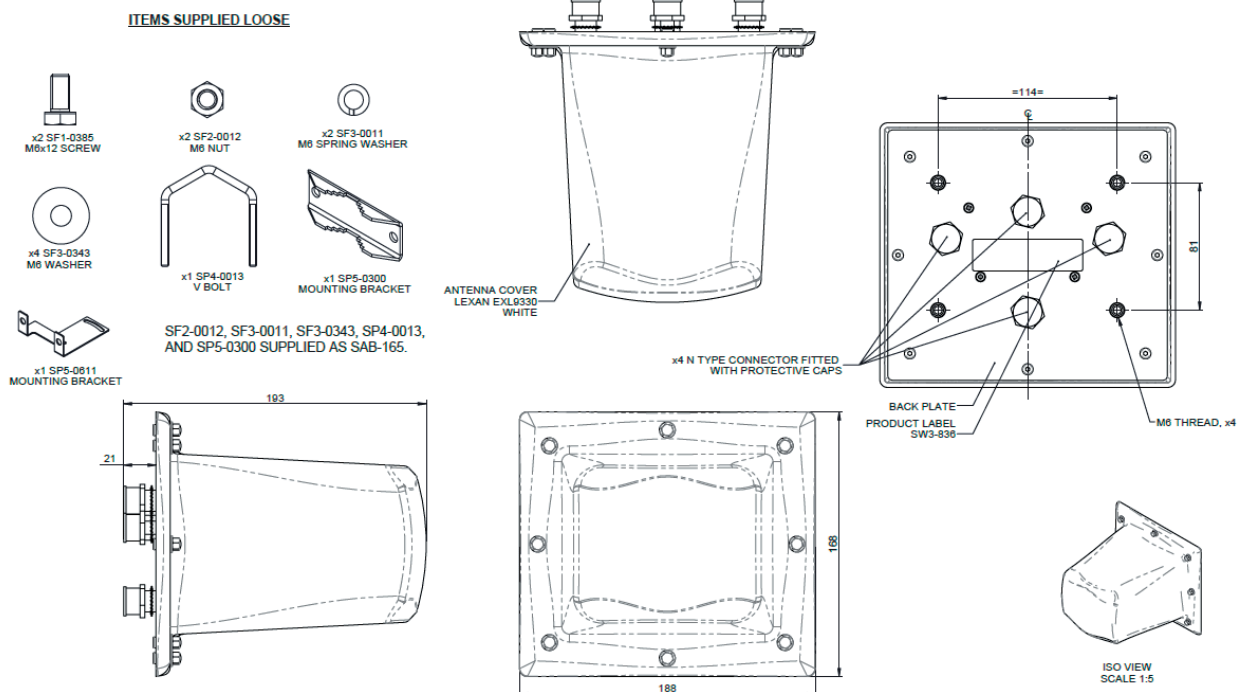

MiMo Directional 2.4/5.0GHz Antenna

WMM[X]9G-24-58-NJ

PANORAMA ANTENNAS

Product Data

Part No.		WMM49G-24-58-NJ	WMM39G-24-58-NJ	WMM29G-24-58-NJ
Electrical Data				
Frequency range (GHz)		4x 2.39-2.485 / 4.9-7.2	3x 2.39-2.485 / 4.9-7.2	2x 2.39-2.485 / 4.9-7.2
Operational bands		4x 2.4/5.0-7.2GHz	3x 2.4/5.0-7.2GHz	2x 2.4/5.0-7.2GHz
Radiation pattern		Directional		
Nominal polarisation		2x Horizontal 2x Vertical	1x Horizontal 2x Vertical	1x Horizontal 1x Vertical
Peak gain (excl cable loss)+	2.45 GHz	9dBi		
	5-6 GHz	9dBi		
Typical 3dB beamwidth o +	2.45 GHz H Plane	65		
	5-6 GHz H Plane	70		
	2.45 GHz E Plane	55		
	5-6GHz E Plane	60		
Efficiency - excluding cable loss (all bands)		> 70%		
Correlation co-efficient (all bands)		< 0.2		
Max input power (W)		20 Watts		
Nominal impedance		50Ω		
Mechanical Data				
Dimensions (mm)	Height	168 (6.6")		
	Width	188 (7.4")		
	Depth	193 (7.6")		
Operating temp (°C)		-40° / +80°C (-40° / 176°F)		
Material		Lexan EXL 9330		
Colour		White		
Mounting Data				
Fixing		Rail mount / mast mount		
Mounting bracket material		Stainless steel / Aluminium		
Pole diameter (mm)		20-50 / (0.78 - 1.96")		
Connector Data				
Type	N female x 4	N female x 3	N female x2	

+Peakgain and beamwidth data for each element measured individually based on a vertically polarised element


+ Swept peak gain simulated in CST Microwave studio for each element excluding cable loss

MiMo Directional 2.4/5.0GHz Antenna

WMM[X]9G-24-58-NJ


Electrical Data - Cell

Typical VSWR*

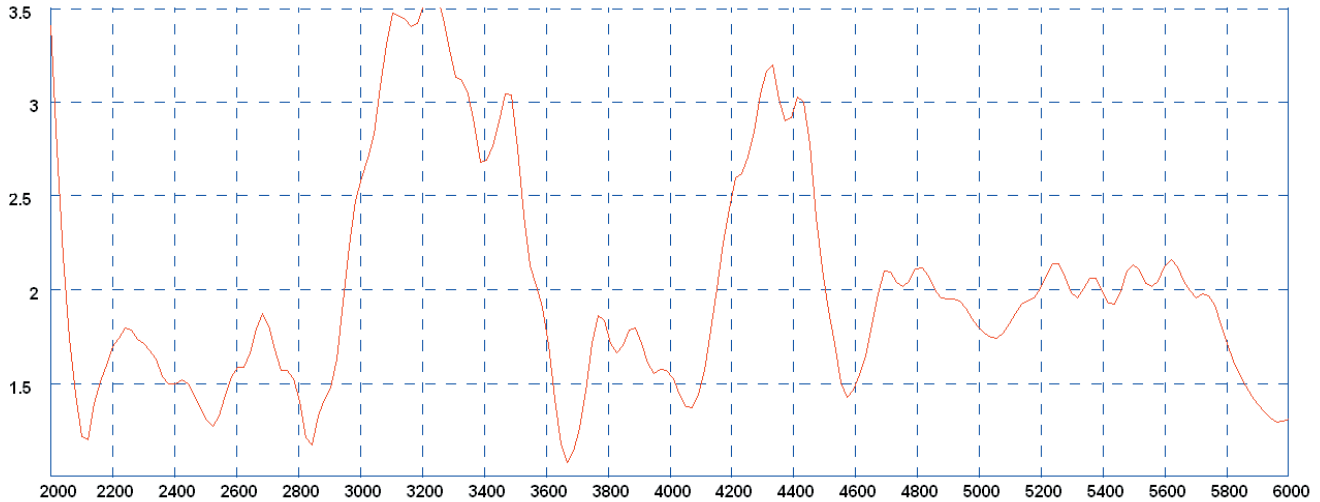


*VSWR of typical element measured in free space without cable

Typical Worst Case Isolation **

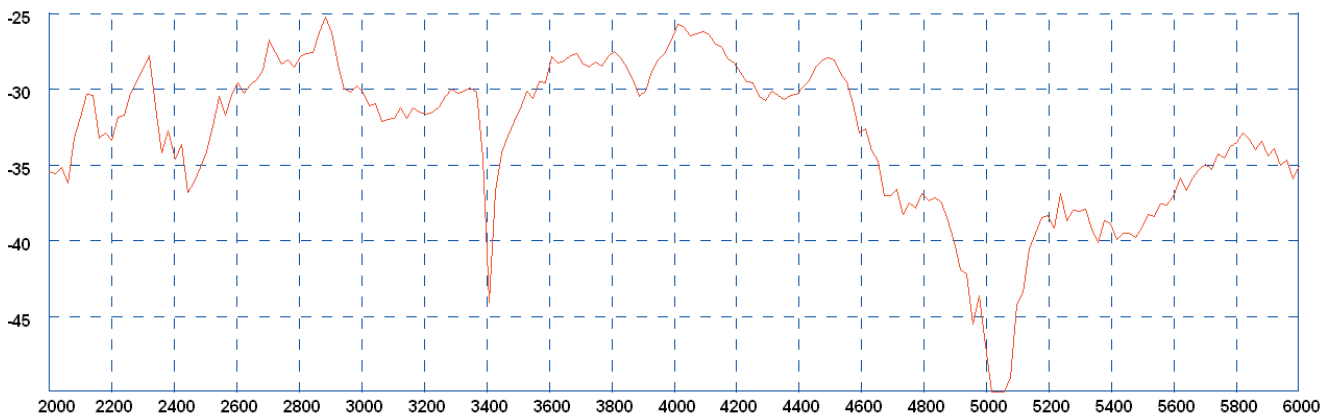

**Isolation measured in free space without cable.

Typical Swept Peak Gain ***

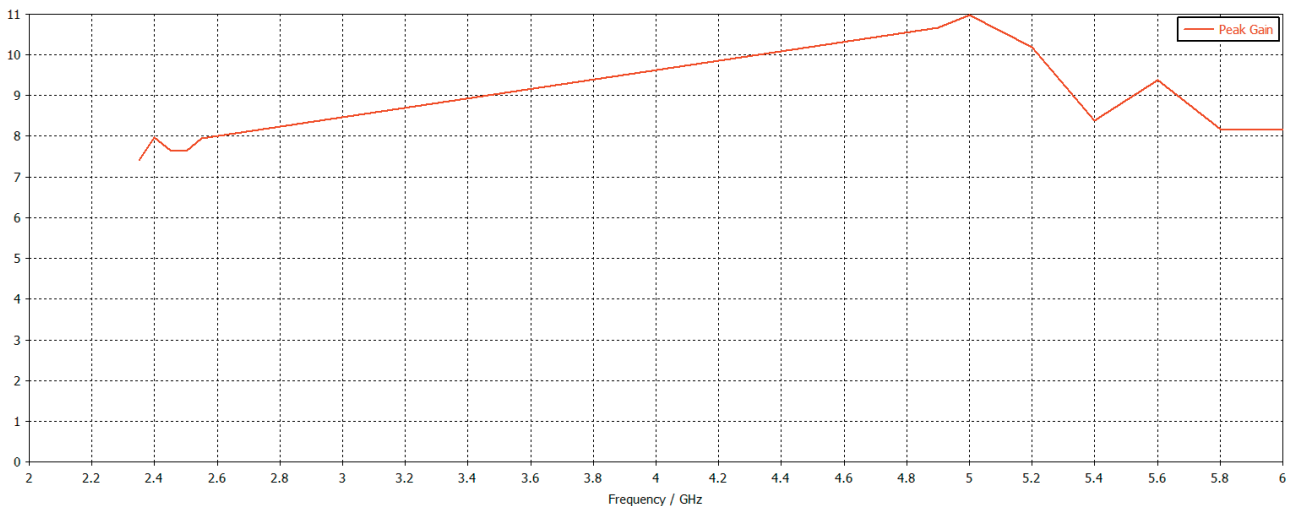

*** Swept peak gain simulated in CST Microwave studio for each element excluding cable loss


MiMo Directional 2.4/5.0GHz Antenna

WMM[X]9G-24-58-NJ


* Patterns simulated in CST Microwave studio based on 4x Elements fed together

Pattern Data 4x
Elements


Typical 3D Pattern 2.45GHz**

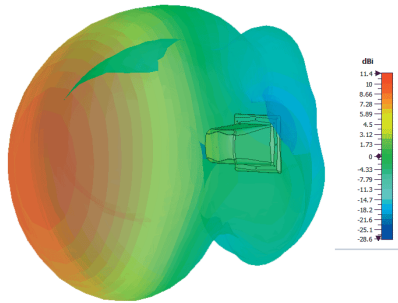


Typical E Plane Pattern 2.45GHz**

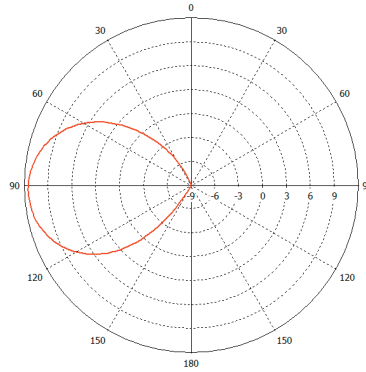


Typical H Plane Pattern 2.45GHz**

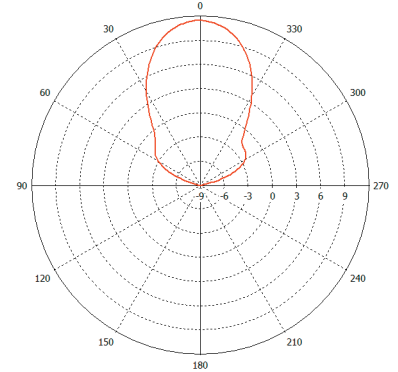


Typical 3D Pattern 5.4GHz**

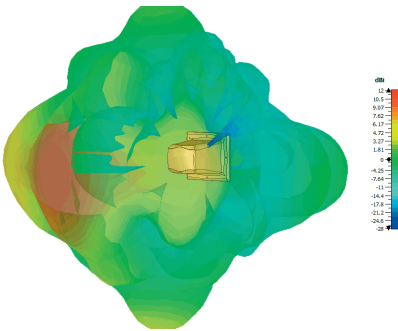

Typical E Plane Pattern 5.4GHz**

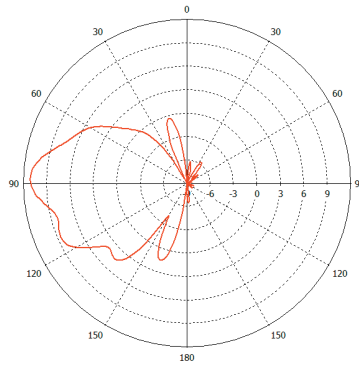


Typical H Plane Pattern 5.4GHz**

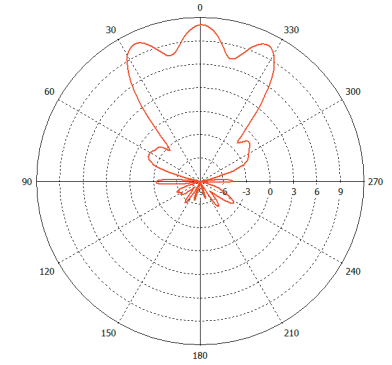


* Patterns simulated in CST Microwave studio based on 1x vertically polarised element fed individually

Pattern Data 1x
Elements


Typical 3D Pattern 2.45GHz**

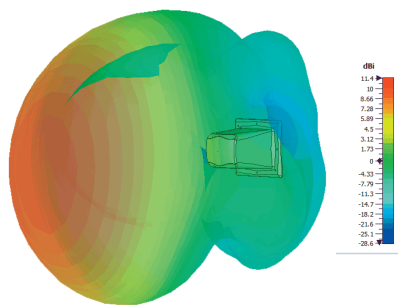


Typical E Plane Pattern 2.45GHz**

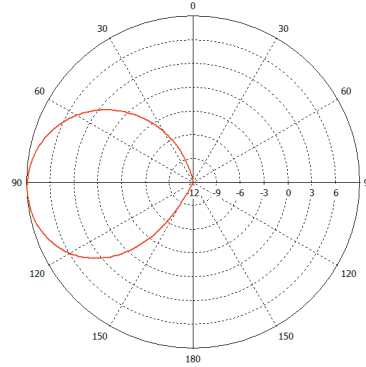


Typical H Plane Pattern 2.45GHz**

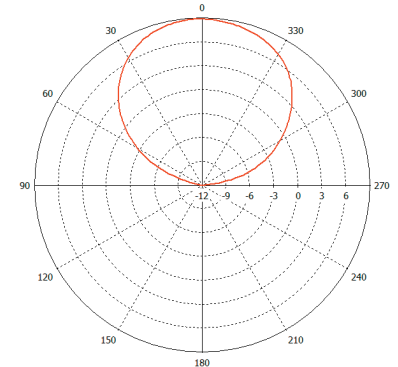

Typical 3D Pattern 5.4GHz**

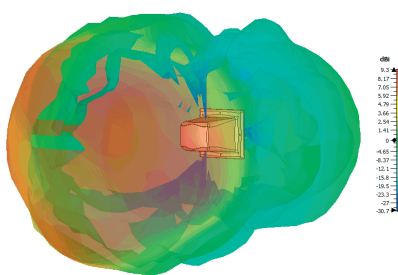

Typical E Plane Pattern 5.4GHz**

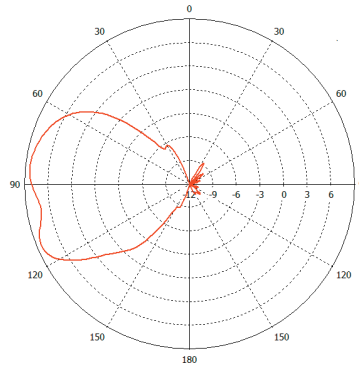

Typical H Plane Pattern 5.4GHz**

