

# BMT-CI4

## BACnet MS/TP Current Input Module




- 2선식 BACnet MS/TP 포트 1개
- 통신 속도: 9600, 19200, 38400, 57600, 76800, 115200 Baud Rate
- 네트워크 주소: 00~F9 (0~249)
- LED: 동작 상태 및 에러 표시
- 동작 전원: 24V AC/DC
- IP40 보호 규격
- 35mm 단레일 장착
- 동작 온도: -5 ~ +55°C




프로토콜	BACnet MS/TP
Address 범위	00 ~ F9
인터페이스	RS485 (two-wire bus)
Baud Rate	9600 to 115200 bit/s
소비 전압	24 V AC/DC $\pm$ 10% (SELV)
소비 전력	25 mA (AC) / 10 mA (DC)
Relative duty cycle	100%
입력	4 X Analog Input, 0 ~ 10V DC, 0(4) ~ 20 mA DC
Display	Green / Red LED
동작 환경 / 동작 온도	IP40, -20°C ~ +70°C
크기/무게	35(W) x 60(D) x 69.3(H) mm / 95 g
인증	KC, CE, FCC, UL, BTL

# Wiring Diagram

## Wiring Diagram


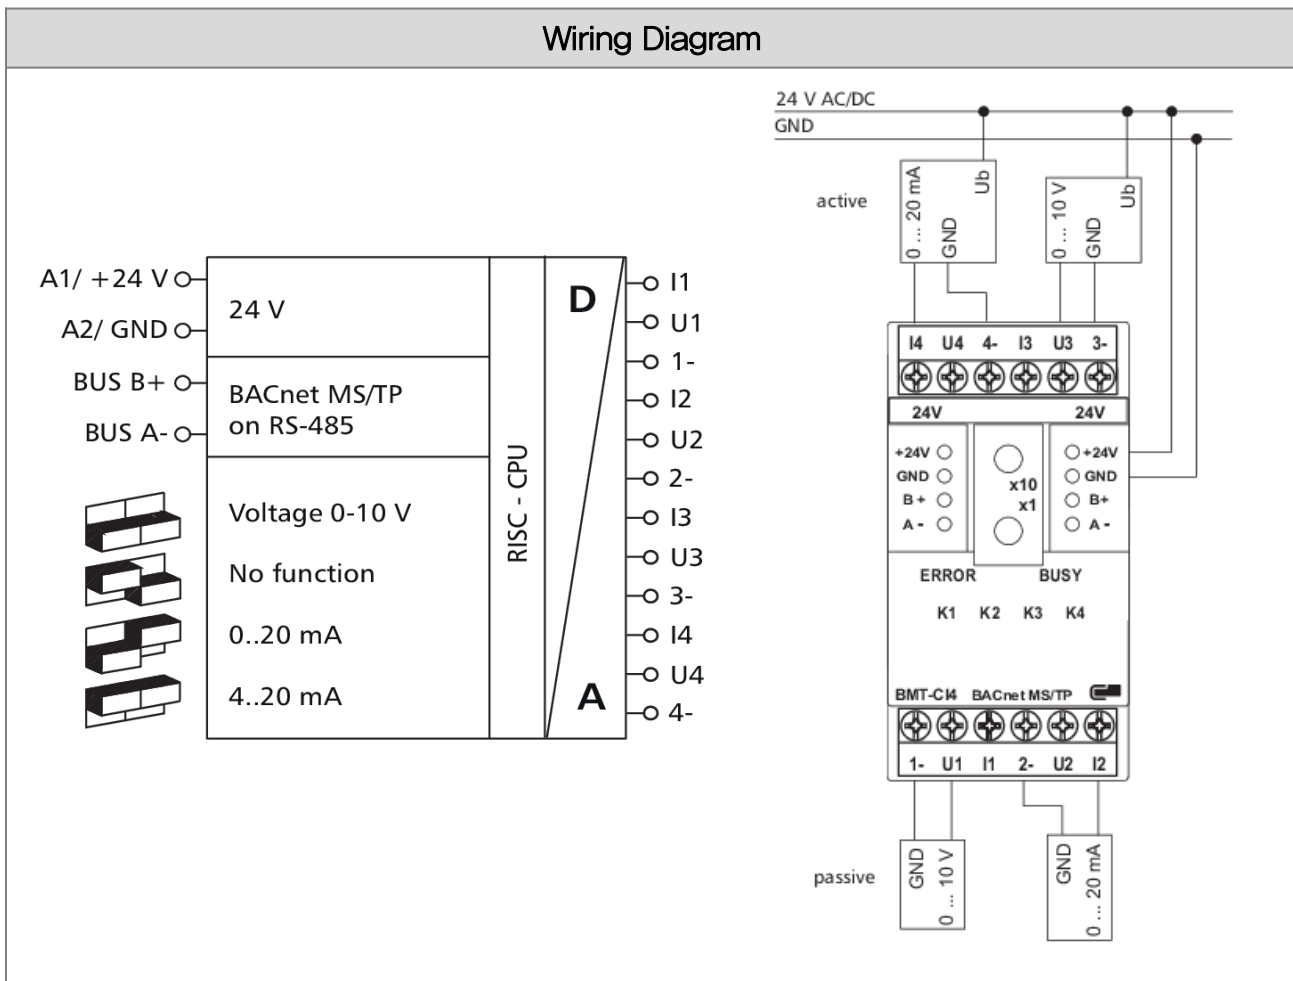


## Connection Example

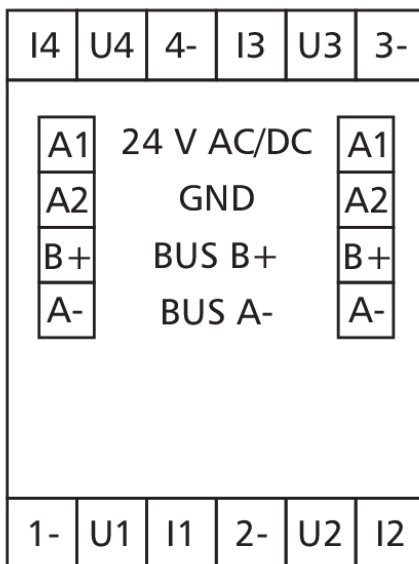

# Dimensions

## Dimensions

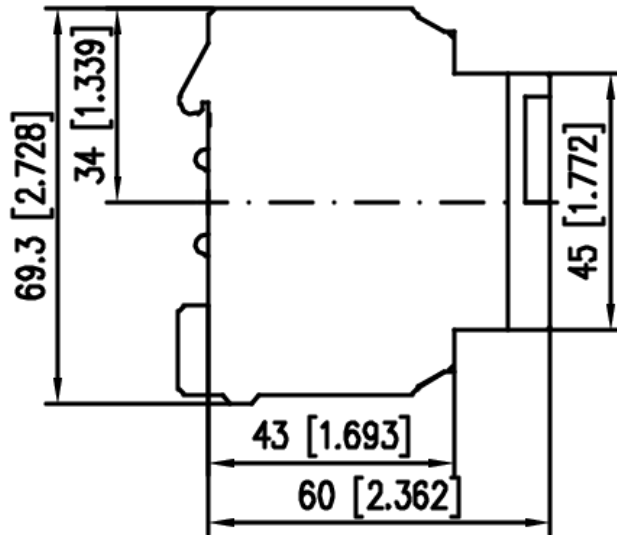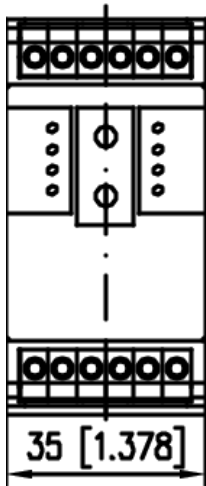

**(W)35 mm x (D)60 mm x (H)69.3 mm**